User Instruction

Touch Dimming Remote
Model No: LM097


0320-1

Features


Touch dimming remote is a newly developed remote with elegant and fashionable appearance. We use high-precision IC, touching is sensitive and stable. And we adopt 2.4G high frequency wireless control method with the features of low power consumption, long distance transmitting, strong anti-interference and fast communication rate. Working on all our brightness dimming products.

Parameters

Working Voltage: 3 V (AAA Battery x 2PCS)
Transmitting Power: 6dBm
Standby Power: 10uA
Working Temperature: -20 ~ 60℃
Radio Frequency: 2400-2483.5 MHz
Modulation Method: GFSK
Control Distance: 30m




Products Key Diagram

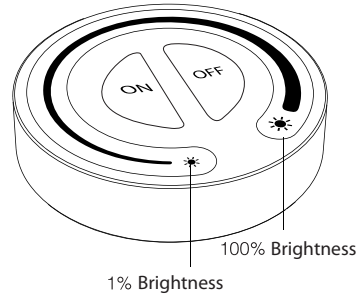


OFF: Short press to turn off the light; Long press to Night Light Mode
Dimming slider: Touch adjust 1~100% brightness.

Installation


1. Install the remote to the selected place; keep the two screw on the same level; install it with arrow up.



2. Install battery (AAA battery*2PCS), then fix it on the base.



3. Press downward and rotate to the left to fix it.



Dismantling: Rotate to the right, then pluck it down.



Linking&Unlinking

Remark: The light can be working after linking with the remote.

Linking Instructions

1. Switch off the light, after 10 seconds switch on again.
2. When the light on, short press press **"ON" 3 times** within 3 seconds.
3. The light blink 3 times slowly means the linking is done successfuly.

Noet: If the light not blink slowly, the linking failed, please switch off the light again, and follow the above steps again.

Unlinking Instructions

1. Switch off the light, after 10 seconds switch on again.
2. When the light on, short press **"ON" 5 times** within 3 seconds.
3. The light blinking 10 times quickly, means the unlinking successfully.

Noet: If the light not blink quickly, the unlink failed, please switch off the light again, and follow the above steps to unlink again.

Attention

1. Remote only control specified Mi-Light and MiBoxer products; not all series can work on this remote.

2. In the using of the remote, if the indicated lamp blinking quickly, please change the battery in time. Please don't use poor quality battery to avoid the leaking of battery liquid to damage the remote.

3. This product is precise electronic product; don't use it in humid, high temperature, dust and high voltage environment; saving it at indoor, dry and no static electricity environment.

4. Please don't use the remote on the wide-range metal or strong electromagnetic wave area, otherwise, it will badly affect the controlling distance.

Producent: LVT Sp. z o.o.
ul. Piecewska 19, 80-288 Gdańsk
Made in P.R.C

Instrukcja obsługi

Dotykowy pilot do ściemniania
Nr modelu: LM097


0320-1

Funkcje


Dotykowy pilot ściemniający to nowo opracowany pilot o eleganckim i modnym wyglądzie. Używamy precyzyjnych układów scalonych, dzięki czemu dotyk jest czuły i stabilny. Stosujemy bezprzewodową metodę sterowania 2.4G o wysokiej częstotliwości, charakteryzującą się niskim zużyciem energii, transmisją na duże odległości, silnym przeciwdziałaniem zakłóceniom i szybką komunikacją. Pracuje na wszystkich naszych produktach do ściemniania jasności.

Parametry

Napięcie robocze: 3 V (bateria AAA x 2 PCS)
Moc nadawania: 6dBm
Moc w trybie czuwania: 10uA
Temperatura pracy: -20 ~ 60℃
Częstotliwość radiowa: 2400-2483,5 MHz
Metoda modulacji: GFSK
Odległość sterowania: 30m




Schemat klucza produktów




OFF: Krótkie naciśnięcie wyłącza światło;
Długie naciśnięcie wyłącza światło.
Tryb oświetlenia nocnego
Suwak przyciemniania:
Dotykowa regulacja jasności 1~100%.

Instalacja


1. Zainstaluj pilota w wybranym miejscu; trzymaj dwie śruby na tym samym poziomie; zainstaluj go strzałką do góry.



2. Zainstaluj baterię (bateria AAA*2PCS), a następnie zamocuj ją na podstawie.



3. Naciśnij w dół i obróć w lewo, aby go naprawić.



Demontaż: Obróć w prawo, a następnie pociągnij w dół.



Łączenie i odłączanie

Uwaga: Światło może działać po połączeniu z pilotem.

Instrukcje łączenia

1. Wyłącz światło, a po 10 sekundach włącz je ponownie.
2. Gdy światło jest włączone, naciśnij krótko przycisk **"ON" 3 razy** w ciągu 3 sekund.
3. Dioda mignie 3 razy powoli, co oznacza, że łączenie zostało pomyślnie.
Uwaga: Jeśli lampka nie miga powoli, łączenie nie powiodło się, należy ponownie wyłączyć światło i ponownie wykonać powyższe kroki.

Instrukcje odłączania

1. Wyłącz światło, a po 10 sekundach włącz je ponownie.
2. Gdy światło jest włączone, naciśnij krótko przycisk **"ON" 5 razy** w ciągu 3 sekund.
3. Światło mignie szybko 10 razy, co oznacza, że odłączenie powiodło się.
Uwaga: Jeśli lampka nie miga szybko, odłączenie nie powiodło się, należy ponownie wyłączyć światło i wykonać powyższe kroki, aby odłączyć ponownie.

Uwaga

1. Pilot steruje tylko określonymi produktami Mi-Light i MiBoxer;
nie wszystkie serie mogą współpracować z tym pilotem.

2. Podczas korzystania z pilota, jeśli wskazana lampka miga szybko, należy wymienić baterię na czas. Nie używaj baterii niskiej jakości, aby uniknąć wycieku płynu z baterii i uszkodzenia pilota.

3. Ten produkt jest precyzyjnym produktem elektronicznym; nie należy go używać w środowisku wilgotnym, o wysokiej temperaturze, zapyleniu i wysokim napięciu; należy go przechowywać w pomieszczeniach, suchych i pozbawionych ładunków elektrostatycznych.

4. Nie używaj pilota na metalowych powierzchniach o dużym zasięgu lub w obszarze silnych fal elektromagnetycznych, w przeciwnym razie wpłynie to negatywnie na odległość sterowania

Producent: LVT Sp. z o.o.
ul. Piecewska 19, 80-288 Gdańsk
Made in P.R.C