
1-PHASE TRACKLIGHT READY SET-UPS

SURFACE-MOUNTED





*no bulbs included

Track rail 1m + 3x Pendant tracklight

INDEX	LIGHT SOURCE	POWER	DIMENSIONS [MM]	IP	MATERIAL
8713	Light bulb 3x GU10	max. 35W	1000 x 55 x 1350	20	Aluminum

*contains power connector + track rail end cap

Track rail 2 x 0,75cm + 4x Tracklight + Connector type L & I

INDEX	COLOR	LIGHT SOURCE	POWER	IP	MATERIAL
XD-IT201W	White matte	Light bulb 4x GU10	max. 35W	20	Aluminum
XD-IT201B	Black matte	Light bulb 4x GU10	max. 35W	20	Aluminum

*contains power connector + track rail end cap



Track rail 2 x 1m + 4x Tracklight + Connector type L & I


INDEX	COLOR	LIGHT SOURCE	POWER	IP	MATERIAL
XD-IT202W	White matte	Light bulb 4x GU10	max. 35W	20	Aluminum
XD-IT202B	Black matte	Light bulb 4x GU10	max. 35W	20	Aluminum


*contains power connector + track rail end cap



*no bulbs included

1-PHASE TRACKS AND CONNECTORS

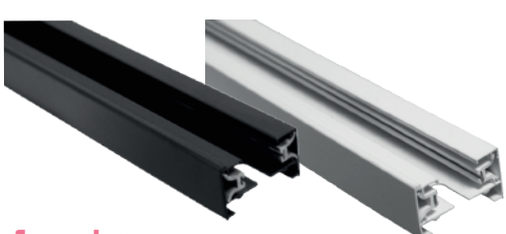

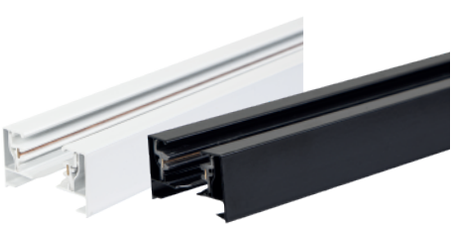

1-meter

INDEX	COLOR	DIMENSIONS [MM]	IP	MATERIAL
XD-IT221W	White matte	1000 x 34 x 19 **921 x 34 x 19	20	Aluminum
XD-IT221B	Black matte	1000 x 34 x 19 **921 x 34 x 19	20	Aluminum

*contains power connector + track rail end cap
**dimensions without accessories


2-meter

INDEX	COLOR	DIMENSIONS [MM]	IP	MATERIAL
XD-IT222W	White matte	2000 x 34 x 19 **1921 x 34 x 19	20	Aluminum
XD-IT222B	Black matte	2000 x 34 x 19 **1921 x 34 x 19	20	Aluminum

*contains power connector + track rail end cap
**dimensions without accessories


type I

INDEX	IP	MATERIAL
XD-IT230W	20	Metal + ABS
XD-IT230B	20	Metal + ABS



type L

INDEX	IP	MATERIAL
XD-IT231W	20	Metal + ABS
XD-IT231B	20	Metal + ABS




type I power supply

INDEX	IP	MATERIAL
XD-IT233W	20	Metal + ABS
XD-IT233B	20	Metal + ABS



type T

INDEX	IP	MATERIAL
XD-IT232W	20	Metal + ABS
XD-IT232B	20	Metal + ABS



1-PHASE TRACKS AND CONNECTORS HQ



SURFACE-MOUNTED



1-meter

INDEX	COLOR	DIMENSIONS [MM]	IP	MATERIAL
3725	White matte	1000 x 34 x 21 **920 x 34 x 21	20	Aluminum
3715	Black matte	1000 x 34 x 21 **920 x 34 x 21	20	Aluminum

*contains power connector + track rail end cap
**dimensions without accessories

1.5 meters

INDEX	COLOR	DIMENSIONS [MM]	IP	MATERIAL
1105	White matte	1500 x 34 x 21 **1405 x 34 x 21	20	Aluminum
1104	Black matte	1500 x 34 x 21 **1405 x 34 x 21	20	Aluminum

*contains power connector + track rail end cap
**dimensions without accessories

2-meter

INDEX	COLOR	DIMENSIONS [MM]	IP	MATERIAL
3369	White matte	2000 x 34 x 21 **1920 x 34 x 21	20	Aluminum
3462	Black matte	2000 x 34 x 21 **1920 x 34 x 21	20	Aluminum

*contains power connector + track rail end cap
**dimensions without accessories

HQ SOLO

1-meter

INDEX	COLOR	DIMENSIONS [MM]	IP	MATERIAL
6456	White matte	1000 x 34 x 21	20	Aluminum
5693	Black matte	1000 x 34 x 21	20	Aluminum

*contains 2 x track rail end cap

1.5 meters

INDEX	COLOR	DIMENSIONS [MM]	IP	MATERIAL
5522	White matte	1500 x 34 x 21	20	Aluminum
3115	Black matte	1500 x 34 x 21	20	Aluminum

*contains 2 x track rail end cap


2-meter

INDEX	COLOR	DIMENSIONS [MM]	IP	MATERIAL
6300	White matte	2000 x 34 x 21	20	Aluminum
5964	Black matte	2000 x 34 x 21	20	Aluminum

*contains 2 x track rail end cap

type I

INDEX	IP	MATERIAL
3541	20	Metal + ABS
3537	20	Metal + ABS




type I flexible

INDEX	IP	MATERIAL
7450	20	Metal + ABS
7451	20	Metal + ABS




type I power supply

INDEX	IP	MATERIAL
1665	20	Metal + ABS
1662	20	Metal + ABS



type +

INDEX	IP	MATERIAL
4543	20	Metal + ABS
4548	20	Metal + ABS




type L

INDEX	IP	MATERIAL
3714	20	Metal + ABS
3542	20	Metal + ABS



type T

INDEX	IP	MATERIAL
3734	20	Metal + ABS
3599	20	Metal + ABS



power connector

INDEX	IP	MATERIAL
4366	20	Metal + ABS
4368	20	Metal + ABS



track rail end cap

INDEX	IP	MATERIAL
4372	20	ABS
4350	20	ABS



track rail hanging wire

INDEX	LENGTH [CM]	MATERIAL
7452	150	Metal
7453	150	metal



1-PHASE TRACKLIGHT



GX53

INDEX	LIGHT SOURCE	POWER	ANGLE OF ROTATION	DIMENSIONS [MM]	IP	MATERIAL
XD-IK256B	Light bulb GX53	max. 35W	320°	Ø100 x 146	20	Aluminum + Steel + PC
XD-IK256W	Light bulb GX53	max. 35W	320°	Ø100 x 146	20	Aluminum + Steel + PC

*bulb not included



GU10

INDEX	LIGHT SOURCE	POWER	ANGLE OF ROTATION	DIMENSIONS [MM]	IP	MATERIAL
XD-IK252B	Light bulb GU10	max. 35W	320°	Ø70 x 115	20	Aluminum + Steel + PC
XD-IK252W	Light bulb GU10	max. 35W	320°	Ø70 x 115	20	Aluminum + Steel + PC

*bulb not included



GU10

INDEX	LIGHT SOURCE	POWER	ANGLE OF ROTATION	DIMENSIONS [MM]	IP	MATERIAL
XD-IT101B	Light bulb GU10	max. 35W	320°	Ø55 x 126	20	Aluminum + Steel + PC
XD-IT101W	Light bulb GU10	max. 35W	320°	Ø55 x 126	20	Aluminum + Steel + PC

*bulb not included



Vero GX53

INDEX	LIGHT SOURCE	POWER	ANGLE OF ROTATION	DIMENSIONS [MM]	IP	MATERIAL
2500	Light bulb GX53	max. 11W	350°	90 x 82 x 160	20	Aluminum + PC
2498	Light bulb GX53	max. 11W	350°	90 x 82 x 160	20	Aluminum + PC

*bulb not included



Sunda GX53

INDEX	LIGHT SOURCE	POWER	ANGLE OF ROTATION	DIMENSIONS [MM]	IP	MATERIAL
0888	Light bulb GX53	max. 15W	350°	Ø82 x 113	20	Aluminum + PC
0887	Light bulb GX53	max. 15W	350°	Ø82 x 113	20	Aluminum + PC

*bulb not included



Lucerno GU10

INDEX	LIGHT SOURCE	POWER	ANGLE OF ROTATION	DIMENSIONS [MM]	IP	MATERIAL
0217	Light bulb GU10	max. 35W	350°	65 x 55 x 195	20	Aluminum + PC

*bulb not included



Bardo GU10

INDEX	LIGHT SOURCE	POWER	ANGLE OF ROTATION	DIMENSIONS [MM]	IP	MATERIAL
4421	Light bulb GU10	max. 35W	350°	65 x 55 x 195	20	Aluminum + PC

*bulb not included



1-PHASE TRACKLIGHT



Tangi GU10

INDEX	LIGHT SOURCE	POWER	ANGLE OF ROTATION	DIMENSIONS [MM]	IP	MATERIAL
3267	Light bulb GU10	max. 35W	320°	65 x 60 x 160	20	Aluminum
1584	Light bulb GU10	max. 35W	320°	65 x 60 x160	20	Aluminum

*bulb not included



Ring 70mm GU10

INDEX	LIGHT SOURCE	POWER	ANGLE OF ROTATION	DIMENSIONS [MM]	IP	MATERIAL
4437	Light bulb GU10	max. 35W	320°	Ø70 x 190	20	Aluminum
4370	Light bulb GU10	max. 35W	320°	Ø70 x 190	20	Aluminum

*bulb not included



Ring 55mm GU10

INDEX	LIGHT SOURCE	POWER	ANGLE OF ROTATION	DIMENSIONS [MM]	IP	MATERIAL
0312	Light bulb GU10	max. 35W	320°	Ø55 x 175	20	Aluminum

*bulb not included



Primo 60mm GU10

INDEX	LIGHT SOURCE	POWER	ANGLE OF ROTATION	DIMENSIONS [MM]	IP	MATERIAL
7753	Light bulb GU10	max. 35W	320°	100 x 60 x 145	20	Aluminum

*bulb not included



Klemens GU10

INDEX	LIGHT SOURCE	POWER	ANGLE OF ROTATION	DIMENSIONS [MM]	IP	MATERIAL
1666	Light bulb GU10	max. 35W	350°	Ø55 x 100	20	Aluminum
1669	Light bulb GU10	max. 35W	350°	Ø55 x 100	20	Aluminum

*bulb not included



Idar GU10

INDEX	LIGHT SOURCE	POWER	ANGLE OF ROTATION	DIMENSIONS [MM]	IP	MATERIAL
2285	Light bulb GU10	max. 35W	320°	65 x 60 x 224	20	Aluminum
2130	Light bulb GU10	max. 35W	320°	65 x 60 x 224	20	Aluminum

*bulb not included



Gold ring for Idar

INDEX	LIGHT SOURCE	POWER	ANGLE OF ROTATION	DIMENSIONS [MM]	IP	MATERIAL
0294	-	-	-	Ø57 x 18	20	Aluminum



Goldi GU10

INDEX	LIGHT SOURCE	POWER	ANGLE OF ROTATION	DIMENSIONS [MM]	IP	MATERIAL
1574	Light bulb GU10	max. 35W	320°	Ø73 x 180	20	Aluminum + PC

*bulb not included



Elion GU10

INDEX	LIGHT SOURCE	POWER	ANGLE OF ROTATION	DIMENSIONS [MM]	IP	MATERIAL
1617	Light bulb GU10	max. 35W	350°	Ø55 x 140	20	Aluminum
1608	Light bulb GU10	max. 35W	350°	Ø55 x 140	20	Aluminum

*bulb not included



1-PHASE TRACKLIGHT



Abi GU10

INDEX	LIGHT SOURCE	POWER	ANGLE OF ROTATION	DIMENSIONS [MM]	IP	MATERIAL
4193	Light bulb GU10	max. 35W	320°	Ø80 x 166	20	Aluminum + PC
4121	Light bulb GU10	max. 35W	320°	Ø80 x 166	20	Aluminum + PC

*bulb not included



Eos E27

INDEX	LIGHT SOURCE	POWER	ANGLE OF ROTATION	DIMENSIONS [MM]	IP	MATERIAL
1670	Light bulb E27	max. 35W	350°	Ø45 x 140	20	Aluminum

*bulb not included



Leon / Toni GU10 AR 111

INDEX	LIGHT SOURCE	POWER	ANGLE OF ROTATION	DIMENSIONS [MM]	IP	MATERIAL
0844	Light bulb GU10 AR111	max. 35W	320°	130 x 28 x 205	20	Aluminum + PC
0848	Light bulb GU10 AR111	max. 35W	320°	Ø120 x 195	20	Aluminum + PC

*bulb not included



Robio AR 111


INDEX	LIGHT SOURCE	POWER	ANGLE OF ROTATION	DIMENSIONS [MM]	IP	MATERIAL
6532	Light bulb GU10 AR111	max. 16W	320°	145 x 120 x 200	20	Aluminum + ABS + PC
6535	Light bulb GU10 AR111	max. 16W	320°	145 x 120 x 200	20	Aluminum + ABS + PC

*bulb not included



Pulso CCT

INDEX	LIGHT SOURCE	POWER	BRIGHTNESS	LIGHT COLOR	LIGHT DISPERSION ANGLE	CRI	DIMENSIONS [MM]	IP	MATERIAL
4164	LED COB	20W	1600LM	3000K 4000K 6500K	36°	RA>80	Ø76 x 209	20	Aluminum
7936	LED COB	20W	1600LM	3000K 4000K 6500K	36°	RA>80	Ø76 x 209	20	Aluminum

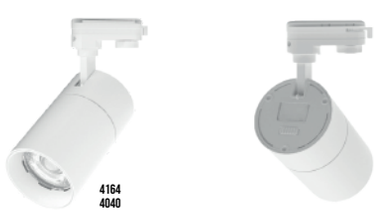

Pulso CCT

INDEX	LIGHT SOURCE	POWER	BRIGHTNESS	LIGHT COLOR	LIGHT DISPERSION ANGLE	CRI	DIMENSIONS [MM]	IP	MATERIAL
4040	LED COB	10W	800LM	3000K 4000K 6500K	36°	RA>80	Ø60 x 190	20	Aluminum
0247	LED COB	10W	800LM	3000K 4000K 6500K	36°	RA>80	Ø60 x 190	20	Aluminum



Piko 10W / 20W / 30W

INDEX	LIGHT SOURCE	POWER	BRIGHTNESS	LIGHT COLOR	LIGHT DISPERSION ANGLE	CRI	DIMENSIONS [MM]	IP	MATERIAL
1841	LED COB	10W	800LM	4000K	24°	RA>80	Ø54 x120	20	Aluminum
1842	LED COB	20W	1600LM	4000K	24°	RA>80	Ø68 x160	20	Aluminum
1487	LED COB	30W	2400LM	4000K	24°	RA>80	Ø78 x180	20	Aluminum



1-PHASE PENDANT TRACKLIGHT / 1-PHASE LED TRACKLIGHT



GX53

INDEX	LIGHT SOURCE	POWER	DIMENSIONS [MM]	IP	MATERIAL
XD-IK258B	Light bulb GX53	max. 35W	Ø100 x 1000	20	Aluminum + Steel + PC
XD-IK258W	Light bulb GX53	max. 35W	Ø100 x 1000	20	Aluminum + Steel + PC

*bulb not included



Ring GU10 1m

INDEX	LIGHT SOURCE	POWER	DIMENSIONS [MM]	IP	MATERIAL
0292	Light bulb GU10	max. 35W	Ø55 x 1200	20	Aluminum + PC

*bulb not included

Keon GU10 1m


INDEX	LIGHT SOURCE	POWER	DIMENSIONS [MM]	IP	MATERIAL
8841	Light bulb GU10	max. 35W	65 x 54 x 1330	20	Aluminum + PC

*bulb not included

GU10

INDEX	LIGHT SOURCE	POWER	DIMENSIONS [MM]	IP	MATERIAL
XD-IK254B	Light bulb GU10	max. 35W	Ø70 x 1000	20	Aluminum + Steel + PC
XD-IK254W	Light bulb GU10	max. 35W	Ø70 x 1000	20	Aluminum + Steel + PC

*bulb not included

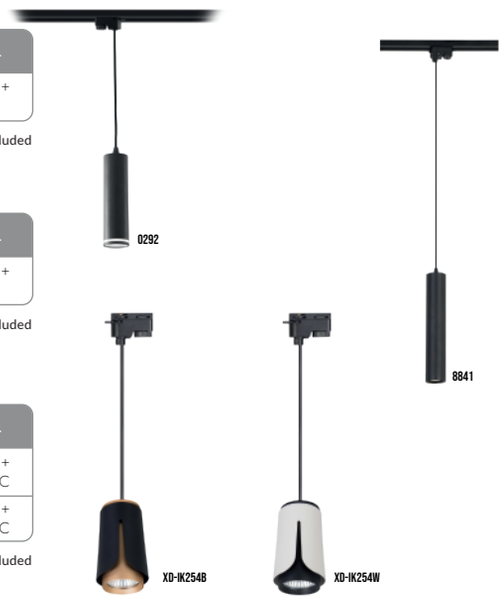


Mondi

INDEX	LIGHT SOURCE	POWER	BRIGHTNESS	LIGHT COLOR	LIGHT DISPERSION ANGLE	CRI	DIMENSIONS [MM]	IP	MATERIAL
7890	LED SMD 2835	30W	2400LM	4000K	120°	RA>80	618 x 34 x 44	20	Aluminium
1320	LED SMD 2835	30W	2400LM	4000K	120°	RA>80	618 x 34 x 44	20	Aluminium
1457	LED SMD 2835	15W	1200LM	4000K	120°	RA>80	353 x 34 x 44	20	Aluminium



Linda

INDEX	LIGHT SOURCE	POWER	BRIGHTNESS	LIGHT COLOR	LIGHT DISPERSION ANGLE	CRI	DIMENSIONS [MM]	IP	MATERIAL
3879	Philips LED	36W	3600LM	4000K	45°	RA>80	900 x 40 x 60	20	Aluminum
4025	Philips LED	24W	2400LM	4000K	45°	RA>80	600 x 40 x 60	20	Aluminum
4024	Philips LED	12W	1200LM	4000K	45°	RA>80	300 x 40 x 60	20	Aluminum

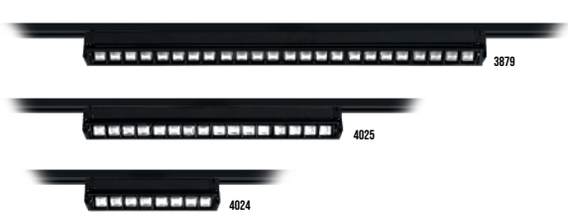

Linda DUO 60cm

INDEX	LIGHT SOURCE	POWER	BRIGHTNESS	LIGHT COLOR	LIGHT DISPERSION ANGLE	CRI	DIMENSIONS [MM]	IP	MATERIAL
4017	Philips LED	2x24W	4800LM	4000K	45°	RA>80	600 x 80 x 60	20	Aluminum



Emma

INDEX	LIGHT SOURCE	POWER	BRIGHTNESS	LIGHT COLOR	LIGHT DISPERSION ANGLE	CRI	DIMENSIONS [MM]	IP	MATERIAL
4194	Philips LED	50W	4800LM	4000K	150°	RA>80	1200 x 40 x 60	20	Aluminum
4047	Philips LED	40W	3600LM	4000K	150°	RA>80	900 x 40 x 60	20	Aluminum
4046	Philips LED	30W	2400LM	4000K	150°	RA>80	600 x 40 x 60	20	Aluminum




TRACKS AND CONNECTORS / 3-PHASE TRACKLIGHT

SURFACE-MOUNTED

1-meter

INDEX	MOUNTING	DIMENSIONS [MM]	IP	MATERIAL
4911	Surface mounting	1000 x 32 x 34 **930 x 32 x 36	20	Aluminum
4917	Surface mounting	1000 x 32 x 34 **930 x 32 x 36	20	Aluminum

*contains power connector + track rail end cap
**dimensions without accessories

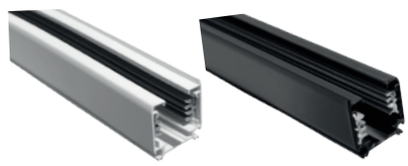

2-meter

INDEX	MOUNTING	DIMENSIONS [MM]	IP	MATERIAL
4921	Surface mounting	2000 x 32 x 34 **1930 x 32 x 36	20	Aluminum
4927	Surface mounting	2000 x 32 x 34 **1930 x 32 x 36	20	Aluminum

*contains power connector + track rail end cap
**dimensions without accessories


type I

INDEX	IP	MATERIAL
4716	20	METAL + ABS
4717	20	METAL + ABS




type +

INDEX	IP	MATERIAL
4721	20	METAL + ABS
4765	20	METAL + ABS



type T

INDEX	IP	MATERIAL
4871	20	METAL + ABS
4903	20	METAL + ABS



type L right

INDEX	IP	MATERIAL
4804	20	METAL + ABS
1532	20	METAL + ABS



type L left

INDEX	IP	MATERIAL
4853	20	METAL + ABS
1531	20	METAL + ABS




power connector

INDEX	IP	MATERIAL
4977	20	METAL + ABS
4985	20	METAL + ABS



track rail end cap

INDEX	IP	MATERIAL
4986	20	ABS
5045	20	ABS



Idar GU10

INDEX	LIGHT SOURCE	POWER	ANGLE OF ROTATION	DIMENSIONS [MM]	IP	MATERIAL
7539	Light bulb GU10	max. 35W	320°	84 x 60 x 242	20	Aluminum
7395	Light bulb GU10	max. 35W	320°	84 x 60 x 242	20	Aluminum

*bulb not included





Abi GU10

INDEX	LIGHT SOURCE	POWER	ANGLE OF ROTATION	DIMENSIONS [MM]	IP	MATERIAL
8582	Light bulb GU10	max. 35W	320°	Ø80 x 166	20	Aluminum + Steel + PC
8581	Light bulb GU10	max. 35W	320°	Ø80 x 166	20	Aluminum + Steel + PC

*bulb not included





AR111 Robio

INDEX	LIGHT SOURCE	POWER	ANGLE OF ROTATION	DIMENSIONS [MM]	IP	MATERIAL
3560	Light bulb GU10	max. 16W	320°	145 x 120 x 205	20	Aluminum + Steel + PC
6533	Light bulb GU10	max. 16W	320°	145 x 120 x 205	20	Aluminum + Steel + PC

*bulb not included





3-PHASE TRACKLIGHT / 1-PHASE LED TRACKLIGHT



Pulso CCT

INDEX	LIGHT SOURCE	POWER	BRIGHTNESS	LIGHT COLOR	LIGHT DISPERSION ANGLE	CRI	DIMENSIONS [MM]	IP	MATERIAL
0849	LED COB	10W	800LM	3000K 4000K 6500K	36°	RA>80	Ø60 x 215	20	Aluminum
4165	LED COB	10W	800LM	3000K 4000K 6500K	36°	RA>80	Ø60 x 215	20	Aluminum



Pulso CCT

INDEX	LIGHT SOURCE	POWER	BRIGHTNESS	LIGHT COLOR	LIGHT DISPERSION ANGLE	CRI	DIMENSIONS [MM]	IP	MATERIAL
2540	LED COB	20W	1600LM	3000K 4000K 6500K	36°	RA>80	Ø76 x 234	20	Aluminum
1923	LED COB	20W	1600LM	3000K 4000K 6500K	36°	RA>80	Ø76 x 234	20	Aluminum



Oro 30W

INDEX	LIGHT SOURCE	POWER	BRIGHTNESS	LIGHT COLOR	LIGHT DISPERSION ANGLE	CRI	DIMENSIONS [MM]	IP	MATERIAL
5049	Citizen LED COB	30W	2700LM	3000K	24°	RA>90	115 x 140 x 225	20	Aluminum
5089	Citizen LED COB	30W	2700LM	3000K	24°	RA>90	115 x 140 x 225	20	Aluminum
5203	Citizen LED COB	30W	2700LM	4000K	24°	RA>90	115 x 140 x 225	20	Aluminum
5386	Citizen LED COB	30W	2700LM	4000K	24°	RA>90	115 x 140 x 225	20	Aluminum



Sara

INDEX	LIGHT SOURCE	POWER	BRIGHTNESS	LIGHT COLOR	LIGHT DISPERSION ANGLE	CRI	DIMENSIONS [MM]	IP	MATERIAL
1280	Philips LED	48W	4800LM	4000K	45°	RA>80	600 x 80 x 110	20	Aluminum
1341	Philips LED	24W	2400LM	4000K	45°	RA>80	600 x 40 x 110	20	Aluminum



Visit our website

https://lvt.com.pl

or scan the QR code: